

JOCKEY SIGN INSTALLATION INSTRUCTIONS

STEP 1

Lay jockey statue horizontal (on its back) on a blanket with base panel facing up for easier installation.

Installing the sign while the jockey is vertical (standing up) is OK too.

Clean base panel with windex or dishwashing soap and let dry. If base panel paint is chipped or loose, touch up as necessary and let paint dry at least a week before installing sign.

Experiment with central placement of sign on clean base panel to visualize the best look.

Do not install sign below the bottom edge of the base panel so it scrapes the ground.

Remove contents of installation kit and set aside.



STEP 2

Handy tack is provided to hold sign in place while silicone adhesive dries, and to act as “filler” for the recess panel area behind the sign.


Rip tack stick into 3 equal pieces and smudge in center area of recess panel.



STEP 3

Using pointy side of cap, puncture metal seal of silicone tube. An applicator attachment is provided but is not necessary.



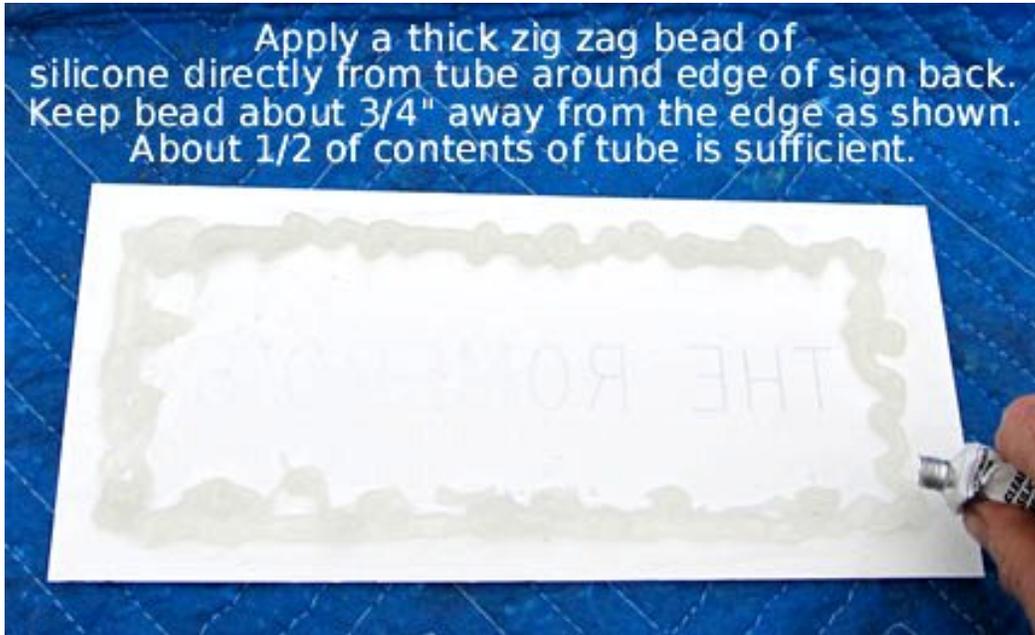

STEP 4

Set sign with back face up on blanket and squeeze a thick bead of silicone about 1/4"-3/8" high around the edges in a zig zag fashion. Keep the bulk of the bead about 1" away from the edge of the sign and leave about a 1/2"-3/4" border area with no silicone. The objective is to make a thick enough bead to attach the sign to the recess panel yet prevent excess silicone from squishing out along the edges.


STEP 5

Carefully apply sign to the base panel.

With sign centered, gently move sign back and forth slightly and push inwards around edges so the silicone bead flows into the recess panel area. If silicone is coming out around edges you are pushing too hard.

Once sign is centered and relatively flat against the base panel, gently push down in the center area of sign so sign sticks to the handy tack you have installed there. This will hold sign in place while the adhesive dries.



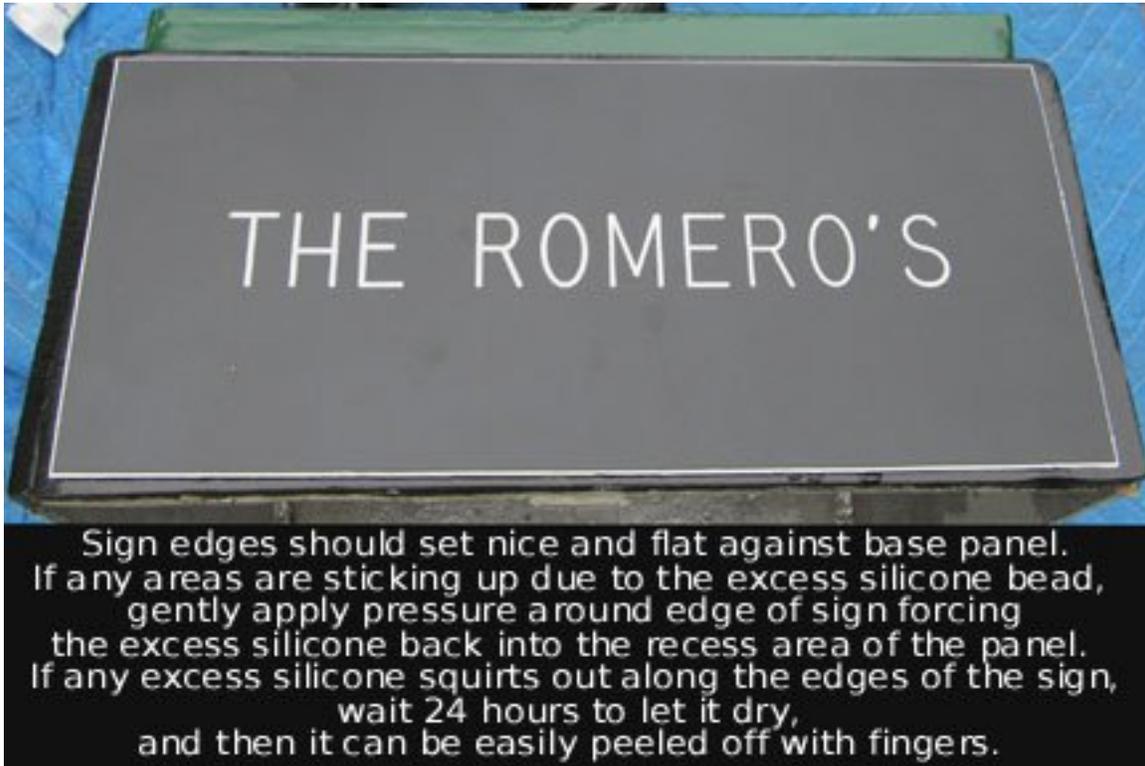

STEP 6

Make one last check to make sure sign is centered and flat as possible(now bowed) against the base panel.

Make final adjustments if necessary. If any excess silicone has squirted out along the edges of the sign or has spilled on the front of the sign, **DO NOT ATTEMPT TO REMOVE IT WHILE WET**. Silicone dries hard in 24 hours and then can easily be peeled off with fingers or carefully cut with a razor(do not apply razor or sharp objects to surface of plastic sign).

Let sign dry 24 hours.

ALL DONE!